

CENTRIFUGAL EXTRACTORS

600 SERIES



GRUPPO

PIERALISI


CENTRIFUGAL EXTRACTORS 600 SERIES

Our 600 series centrifugal extractors are equipped with:

- special device to regulate the liquid ring inside the bowl
- platform and cylindric bowl housing made in carbon steel
- patented sludge scraper for continuous discharge of dewatered sludge from the solids discharge chamber
- special wear-proof protection on peripheral screw area
- electronic safety device for overload protection, with optional visual or acoustic alarm signals
- hard-metal protection bushes on solids discharge holes
- electronic revolution counter, as standard equipment

- optional device for continuous modifications of the revolution speed of the internal screw.

ALL PARTS IN CONTACT WITH PRODUCT IN STAINLESS STEEL

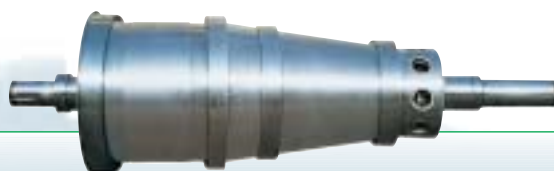

FP 600/M






FP 600 RS/M



FP 600 2RS/M

Model	Main motor power kW	Drum revolution max rpm	Centrifugal force max x g	Slenderness ratio L/D	Drum diameter mm	Hydraulic capacity l/h
FP 600/M	11	4,100	3,300	2.62	353	6,000
FP 600 RS/M	11	4,100	3,300	3.48	353	9,000
FP 600 2RS/M	15	4,100	3,300	4.32	353	12,000

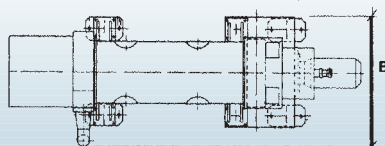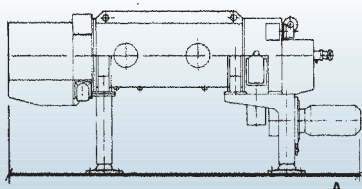

Model	Total length A mm	Total width B mm	Total height C mm
FP 600/M	2,250	1,050	1,400
FP 600 RS/M	2,550	1,050	1,400
FP 600 2RS/M	3,000	1,050	1,400

The company reserves the right to modify the features of its products without notice. Registered trademarks. Advertising material © copyright. All rights reserved.

GRUPPO
PIERALISI

Pieralisi Benelux B.V. - Edisonlaan 22 - 2665 JC - Bleiswijk - The Netherlands - Tel. +31-10-5218788 - Fax +31-10-5218875
www.pieralisi.nl - info@pieralisi.nl